

FIGURE 1

IE ID Length	TI OUI	Type
--------------	--------	------

Fig. 2A

Field	Value		
IE ID	0xDD		
Length	4		
TI OUI	0x080028		
Туре	0x00		

Fig. 2B

Protocol Version				Supported Feature Set Designator			
7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	0

Fig.2C




Fig. 3

24 Octors	8 Octors	4 Octets	n Octets	n Octets	n Octets
802.11 Header	TI SNAP	Concatenation 4X Header	Concatenated MSDU	Concatenated MSDU	Concatonated MSDU

Fig. 4A

1 Octet	1 Octet	1 Octet	3 Octets	2 Octets
DSAP	SSAP	Control	OUI	Type
0xAA	0xAA	0x00	TI = 0x080028	WLAN=0x60D0

Fig. 4B




Fig. 4C

2 Octets	6 Octets	8 Octets	n Octets	0-3 Octets
MSDU Length	DA	SNAP	MSDU Payload	Padding

Fig. 5A

2 Octets	6 Octets	8 Octets	n Octets	0-3 Octets
MSDU Length	SA	SNAP	MSDU Payload	Padding

Fig. 5B

2 Octets	6 Octets	6 Octets	8 Octets	n Octets	0-3 Octets
MSDU Length	SA	DA	SNAP	MSDU Payload	Padding

Fig. 5C

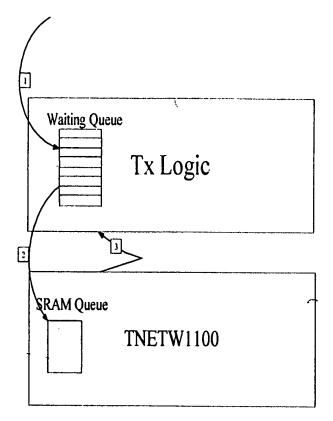


Fig. 6

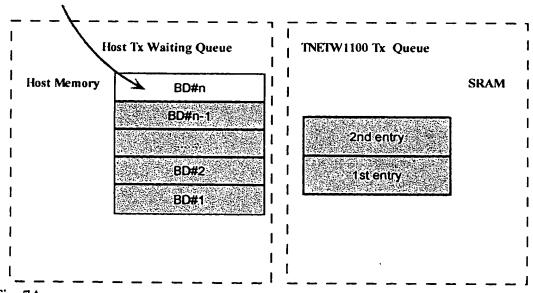


Fig. 7A

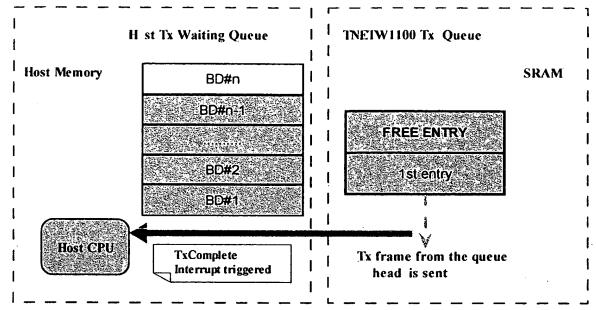


Fig. 7B

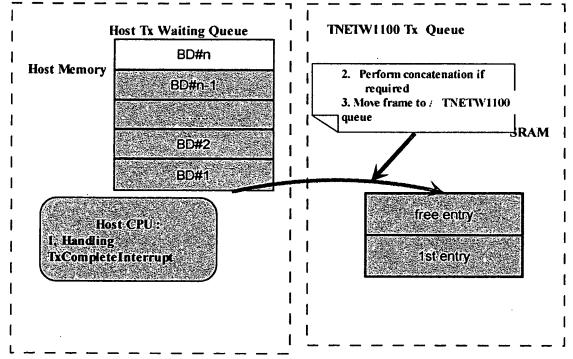


Fig. 7C

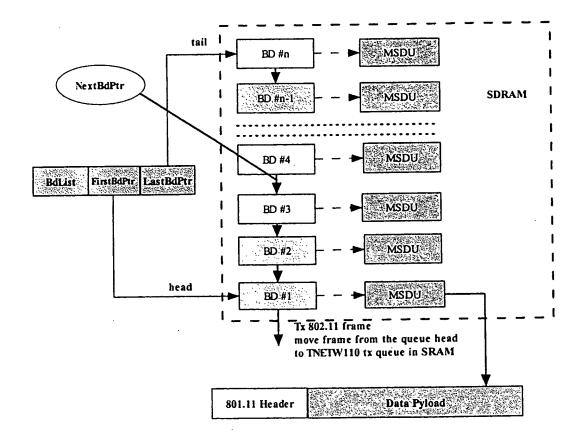


FIGURE 8

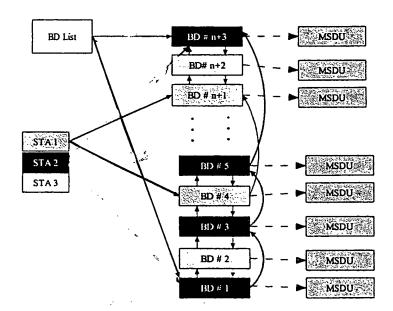
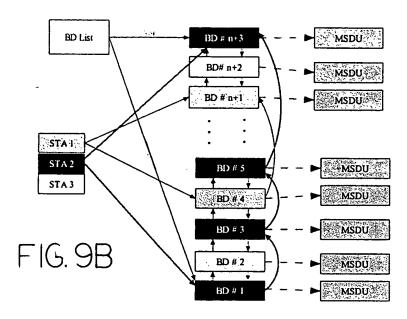
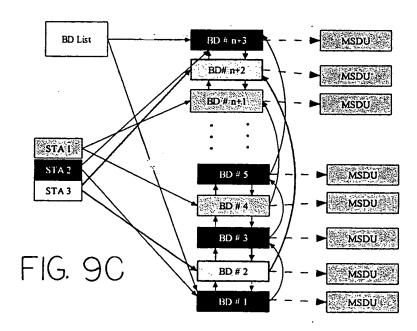


FIGURE 9A





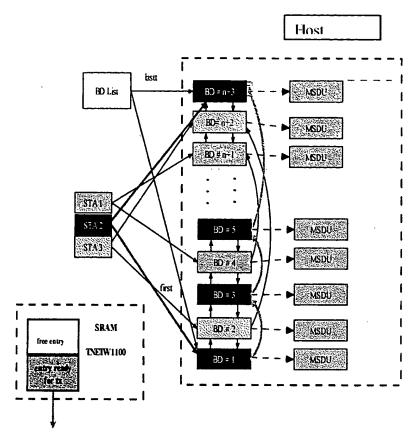


Fig. 10A

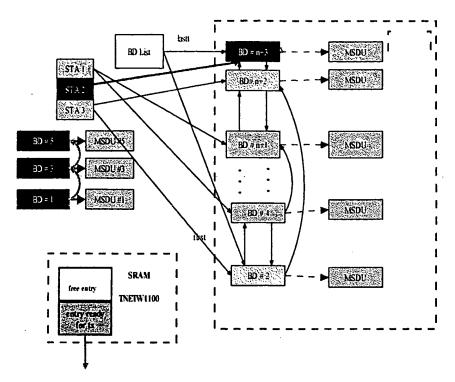


Fig. 10B

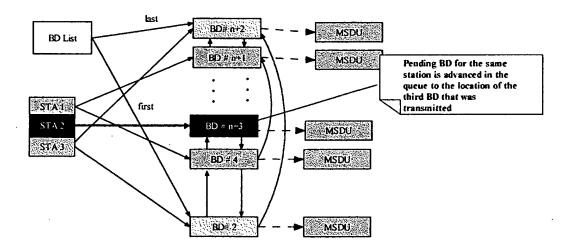


Fig. 10C

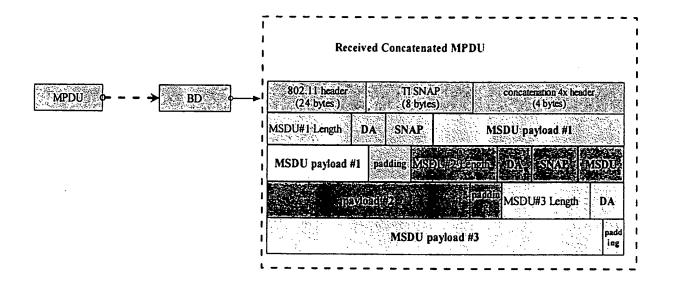


FIG. II

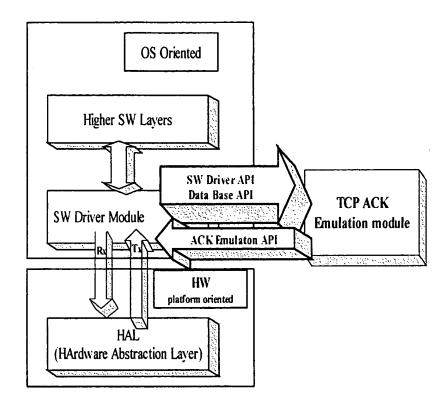
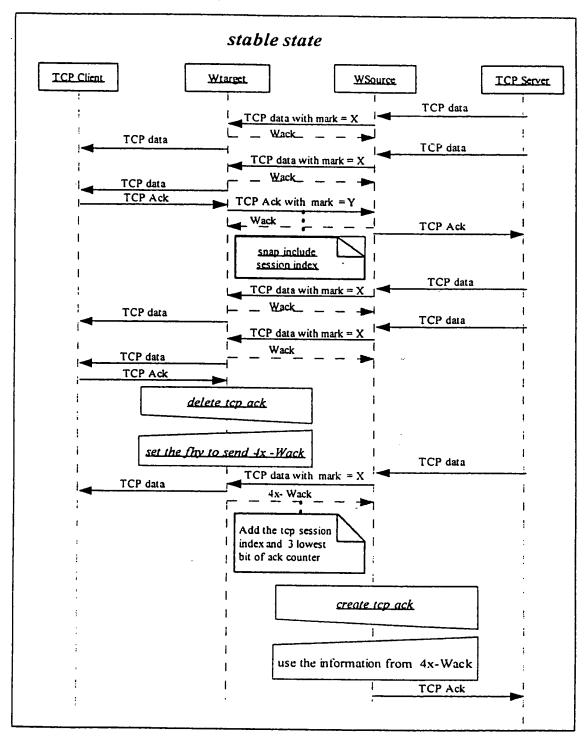


Fig. 12

FIG. 13



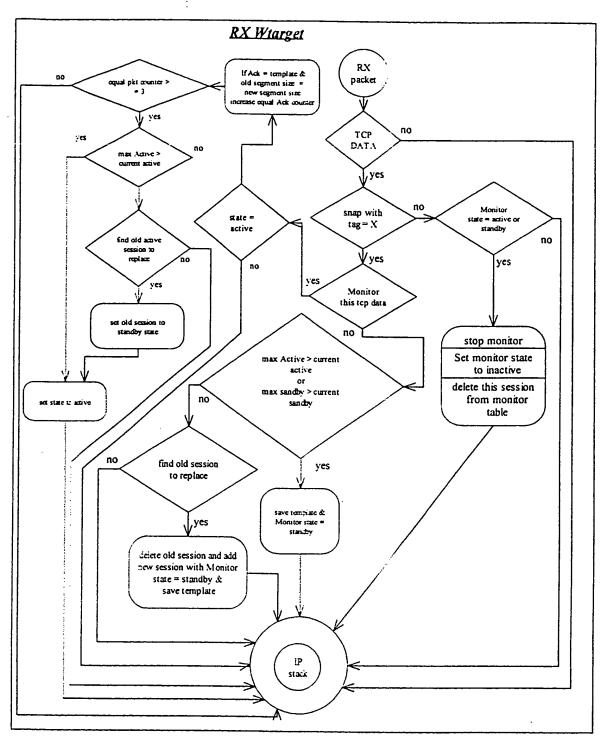


FIG. 14

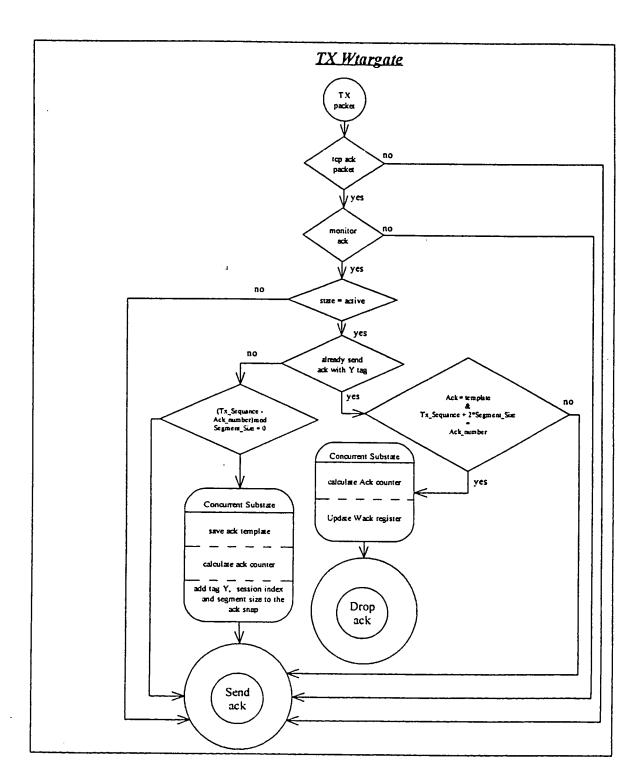


FIG. 15

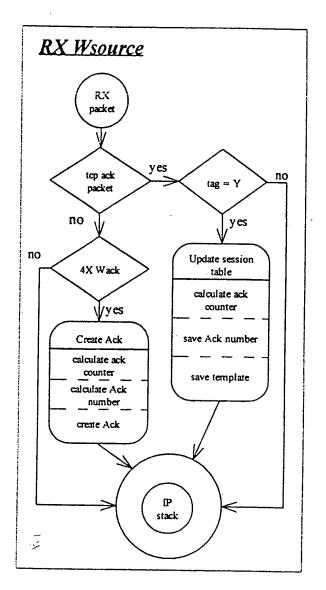


FIG. 16